

EL[®]MARK

The Brand of Electricity

SUPER SLIM LED PANELS

GENERAL INFORMATION »

- ∴ Nominal voltage: 175-264V AC/ 50-60Hz
- ∴ Power: 15W;
- ∴ Power supply: Control gear; DC device- driver
- ∴ Light source: San'an 2835SMD
- ∴ Colour temperature: 4000K
- ∴ Colour body: White
- ∴ Body material: Aluminium
- ∴ Colour rendering index: Ra≥80
- ∴ Switch on/off:>20 000
- ∴ Long life: 30 000h
- ∴ Starting time: <0.5s
- ∴ Power factor: $\lambda > 0.9$
- ∴ Adjustable and slidable spring- can by mounted in cut sizes from 50 to 160mm
- ∴ Protection against dust and moisture: IP40

FEATURES »

- ∴ Completely replace traditional lighting fixtures
- ∴ It is very elegant, with a modern ultra-flat design.
- ∴ Easy to install and maintain.
- ∴ Instant start, no flickering, no humming
- ∴ Safety, low voltage operation
- ∴ Emit a very pleasant and even light with very low glare factor due to the diffusion lens
- ∴ Low power consumption
- ∴ Repeated switch-on/off does not affect the lifespan of the LED panel Environmentally friendly - do not emit mercury and lead
- ∴ No ultraviolet and infrared rays
- ∴ Resistant to shock and vibration
- ∴ Suitable for home, offices, halls, shops, hospitals




TECHNICAL SPECIFICATION SHEET

PRODUCT DETAILS »

Catalogue number	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body
99LED934/W	15	1000	4000	white
99LED935/W	15	1000	6500	white

DIMENSIONS »

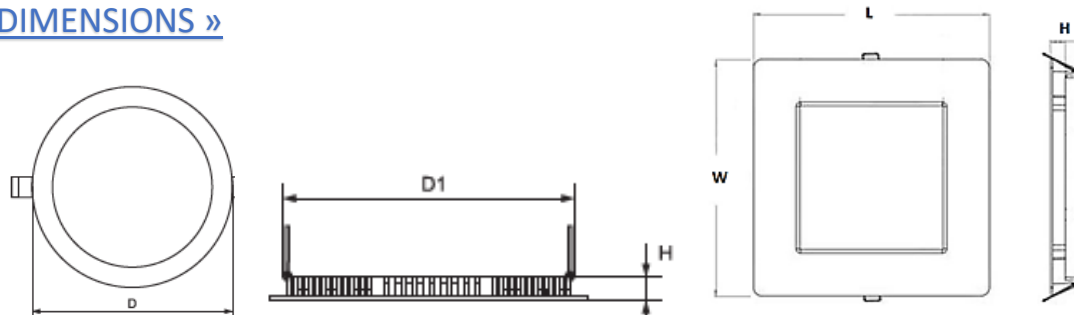

Catalogue number	Diameter/Length (mm)	Width (mm)	Height (mm)	Diameter1 (mm)
99LED934/W	173	-	11	50-160
99LED935/W	175	175	20	50-160

ADDITIONAL INFORMATION »

ELMARK lighting 99LED934/W

This luminaire contains built-in LED lamps.

A++ } **L**
A+ } **E**
A } **D**

~~**B**~~
~~**C**~~
~~**D**~~
~~**E**~~

The lamps cannot be changed in the luminaire.

874/2012

Catalogue number	Barcode	Packing/Box (pcs)
99LED934/W	3800131219152	1/40
99LED935/W	3800131219169	1/40

